

**CALIPERS**

**PADS**

**ROTORS**

**HATS**

**HARDWARE**

Heavy Duty Truck Package

**CAR8959W10SESL/R**

1.75"/1.5"/1.31" (44.5/38.1/33.3mm) Pistons  
Caliper Weight 8.43 lbs.



seal kit (axle set) **CSK333845E751-610**  
1.75"(44.5mm) stainless steel piston **PSH4540X400E**  
1.5"(38.1mm) stainless steel piston **PSH3840X400E**  
1.3"(33.2mm) stainless steel piston **PSH3340X400E**  
bleed screw kit with o-rings (axle set) **FSK3430X371**  
akb springs (six per caliper) **SSC3435X602**  
pad abutment plate (two per caliper) **ASC4489X767**  
pad abutment screw (four per caliper) **BSC0080X017**  
upper wear plate (one per caliper) **PSC4489X678**  
bleed screw cap (two per caliper) **CAB3430X694**  
bleed screw cap o-ring (one per cap) **SER0080X120**


**Compound / Pad Shapes**

**Pagid - PAG8250RSL1B**  
Alcon - PNP4489X(B)599.4

**Project Mu F1090 T28**

**Raybestos ST47R2600.28**

1.10" (28 mm) Thick



\*Rotors are supplied unbedded – bedding recommended for an additional fee

\*Same part number calipers used front and rear

**DIV2202X220S36L/R**  
Replaces DIV2202X220C48L/R  
14.0" x 1.4" (355mm X 35.6mm)  
48 Vane

12 X 9.0" (228.6mm) Bolt Circle


See Chassis Manufacture

See Chassis Manufacture  
12 x 1/4" Bolts

Lightweight Truck Package

**CAR8949AM20SSL/R**

1.625"/1.37"/1.25" (41.3/34.9/31.8mm) Pistons,  
Caliper Weight 6.4 lbs.

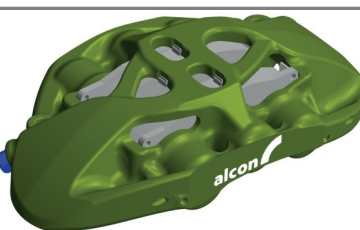

seal kit (axle set) **CSK323541E751**  
1.63"(41.3mm) stainless steel piston **PSS4133X600**  
1.37"(34.9mm) stainless steel piston **PSS3533X600**  
1.25"(31.8mm) stainless steel piston **PSS3233X600**  
bleed screw (two per caliper) **FSB3430X994**  
bleed screw o-ring (two per caliper) **SER0080X841**  
akb spring for small piston (two per caliper) **SSC3435X623**  
akb spring for middle & large piston (four per caliper) **SSC3435X609**  
left pad wear plate (two per caliper) **PSC4489X554L**  
right pad wear plate (two per caliper) **PSC4489X554R**  
pad supports (four per caliper) **SSC4495X561**  
pad support screws (eight per caliper) **BSS0080X524**  
upper wear plate (two per caliper) **CAB3430X555**  
bleed screw cap (two per caliper) **CAB3430X1006**  
bleed screw cap o-ring (one per cap) **SER0080X120**


**Compound / Pad Shapes**

**Raybestos - RAYST47R2602.25**  
Alcon - PNR4489X(B)590.4

**Pagid - PAG1539RSL1**  
Alcon - PNP4489X(B)594.4

**Project Mu F1090 T25**

0.98" (25 mm) Thick



**DIV2175X874GL/R**

14.17" x 1.1" (360mm X 28mm)  
48 Vane

12 X 8.86" (225mm) Bolt Circle

Front:  
**Pro-System PSY H161 1.535 .375**  
Alcon BAD2129X1491  
1.16" (29.46mm) Offset

Rear:  
**Pro-System PSY H161 2.569 .317**  
Alcon BAD2129X1511  
2.25" (57.2mm) Offset

Rear:  
**Pro-System HAT.101062**  
2.23" (56.7mm) Offset

\*Pro-System hats replace Alcon hats

Bobbin:  
**BSD3430X1004**

Conical Spring Washer:  
**WIC3430X1005**

M6 Washer:  
**WSF0080X1076**

M6 Kaylock Nut:  
**NSK0080X064**

M6x30mm Bolt:  
**BSS3430X1010**

Heavy Duty Buggy

**CAR8949W52SESLT/RT**

1.75"/1.5"/1.31" (44.5/38.1/33.3mm) Pistons  
Caliper Weight 6.04 lbs.



1.75"(44.5mm) seal (two per caliper) **SES4500X751**  
1.5"(38.1mm) seal (two per caliper) **SES3800X751**  
1.3"(33.2mm) seal (two per caliper) **SES3300X751**  
1.75"(44.5mm) stainless steel piston **PSS4425X205E**  
1.5"(38.1mm) stainless steel piston **PSS3825X210E**  
1.3"(33.2mm) stainless steel piston **PSS3225X200E**  
bleed screw (two per caliper) **FSB3430X371**  
bleed screw o-ring (two per caliper) **SER0080X445**  
bleed screw kit with o-rings (axle set) **FSK3430X371**  
akb spring for small piston (two per caliper) **SSC3435X623**  
akb spring for middle & large piston (four per caliper) **SSC3435X609**  
left pad wear plate (two per caliper) **PSC4489X546L**  
right pad wear plate (two per caliper) **PSC4489X546R**  
pad supports (four per caliper) **SSC4489X547**  
pad support screws (eight per caliper) **BSS0080X756**  
bleed screw cap (one per caliper) **CAB3430X694**  
bleed screw cap o-ring (one per cap) **SER0080X120**

**Compound / Pad Shapes**

**Raybestos - RAYST47R2600.16**

0.63" (16 mm) Thick



**DIV2197X015C30L/R**

12.75" x 0.94" (324mm X 24mm)  
48 Vane

10 X 8.0" (203.2mm) Bolt Circle

**DIV2197X016C30L/R**

12.75" x 0.94" (324mm X 24mm)  
48 Vane

5X2 X 7.97" (202.4mm) Bolt Circle

**DIV2197X017C30L/R**

13.0" x 0.94" (330mm X 24mm)  
48 Vane

10 X 8.0" (203.2mm) Bolt Circle

**ROR.101247 / 248 - Replacement For DIV2197X021C30L/R**

13.0" x 0.94" (330mm X 24mm)  
48 Vane

10 X 8.25" (209.55mm) Bolt Circle

**ROR.101251 / 252 - Replacement For DIV2197X022C30L/R**

13.0" x 0.94" (330mm X 24mm)  
48 Vane

10 X Slots (203.2mm) Bolt Circle

See Chassis Manufacture

See Chassis Manufacture

Contact Details:  
Pro-System Brakes  
121 Oak Park Drive,  
 Mooresville, NC 28115  
Phone #: (704) 799-8100  
Email: [sales@prosystembrakes.com](mailto:sales@prosystembrakes.com)